



We're More Than Just Rulers!

817 Mohr Avenue ♦ Waterford, WI 53185 ♦ www.QuiltersRule.com ♦ (800) 343-8671



Westalee Cross Hatch Ruler Assembly Instructions

The Cross Hatch Ruler System enables you to stay in front of your machine and does not require any form of marking. Easy to set up.

Parts needed to start:

Westalee Cross Hatch Ruler Base (MQT-CHR)

Straight Arm or Decorative Arm

Two Chicago Screws (Included with Cross Hatch Ruler Base)

Small flat head screwdriver




Westalee Cross Hatch Ruler Base

The Cross Hatch Ruler Base – The black Westalee Cross Hatch Ruler Base has a right and left side. Each side has a pivot point and 30° - 90° markings for different angles. The Cross Hatch Ruler Base has two Chicago Screws that are used to attach the many accessories that are available through Quilter's Rule.




The Cross Hatch Ruler Base is “L” shaped. The side with the writing has the pivot points and angle adjustments. This side lays on the quilt. The other edge is designed to be used against the front or back roller. (Option: Clamps may be used to help stabilize the Cross Hatch Ruler Base.) The Base can be turned over to set over the front belly bar, but is assembled slightly different.

Chicago Screws: The Chicago Screw has a post and screw and is used to attach the accessories to the Westalee Cross Hatch Ruler Base. Two sets are needed and come with your Base. They can be either silver or black. These screws should be snug; do not over tighten. Use a flat head screwdriver to loosen and tighten the Chicago Screws.

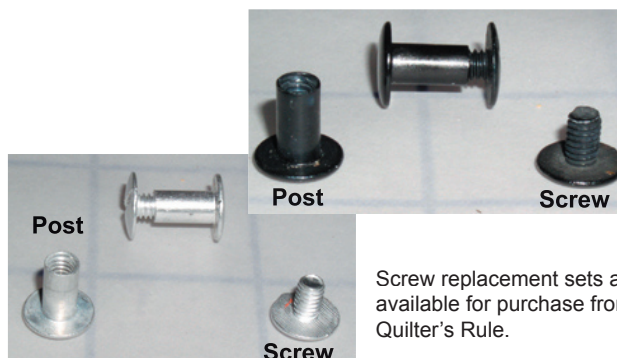


Screw replacement sets are available for purchase from Quilter's Rule.

The Arms – There are four straight and nine decorative shapes for arms. All the arms attach the same way. Each arm has three holes in a line on the round end. The two small holes are to attach the arm to the base. The large center hole is used for hanging the tool when not in use.

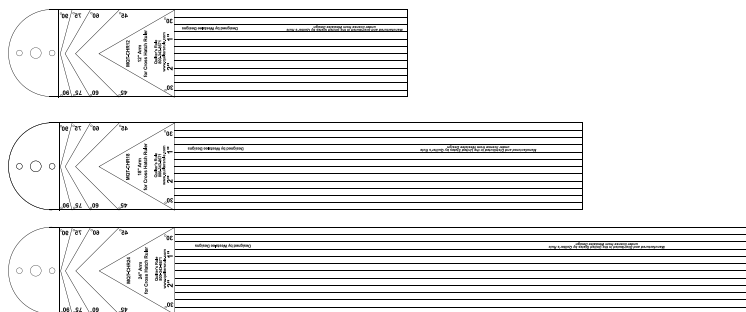


12", 18", 24", and 40" Straight Arms for cross hatching available from Quilter's Rule. (40" straight is not shown.)

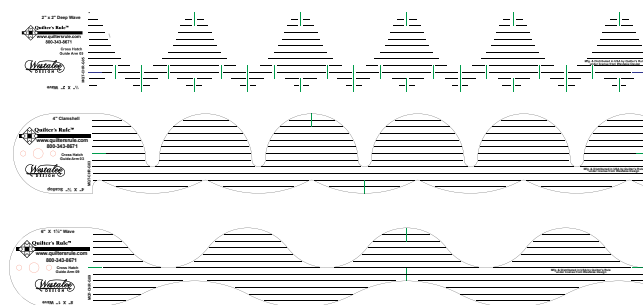

Sample of the decorative arms available from Quilter's Rule. There are currently nine available.

General Assembly Instructions

Remove the two Chicago Screws from the Cross Hatch Ruler Base. Insert the two posts of both Chicago Screws through the two smaller holes on the arm. Place Cross Hatch Ruler Base over the arm with the posts. The post in the rounded end of arm goes into the pivot hole on the Base and the other post goes into the angle setting. Once the arm is in position with the pivot hole and angle adjustment, place the screw into the post and tighten until snug. (Do not over tighten as you may strip the screw.)

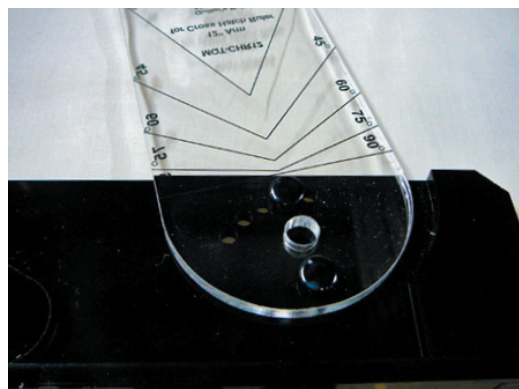

Close up view of arm attached to underside of base.



Back side of the Cross Hatch Ruler Base. Located behind the pivot and angle adjustment holes, the area is notched out for the straight, decorative arms, and other accessory tools to fit into.



Top view close up.

NOTE: When using the Cross Hatch Ruler System the arm should **always** be next to your quilt.

How the Cross Hatch System is used:


The Cross Hatch System can be used against the front or back rollers or over the front belly bar. If using the system over the front belly bar, assembly is slightly different.




Close up views of the Cross Hatch Ruler Base used against back roller bar. (View would be the same if used against front roller bar.)

Assembly for front belly bar or floating the quilt:


The arm is attached to the print side of the Cross Hatch Ruler Base. Turn the base over so the print side of the Cross Hatch Ruler Base is against the quilt.

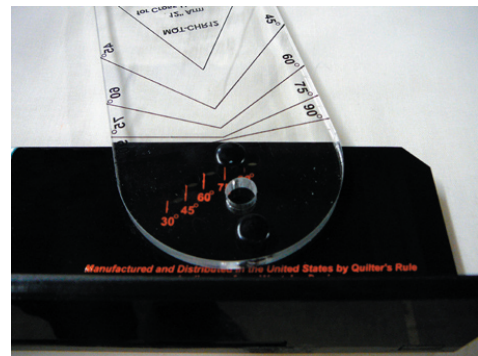

Close up view of the arm assembly for the Cross Hatch Ruler Base being used over the front belly bar.

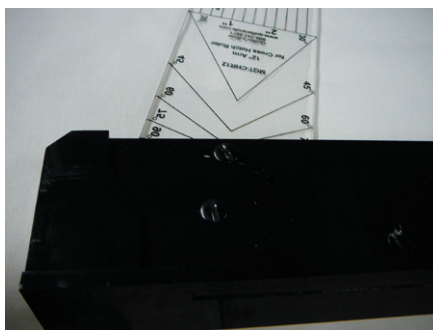

Cross Hatch Ruler Base turned upside down to be used over the front belly bar or floating the quilt.

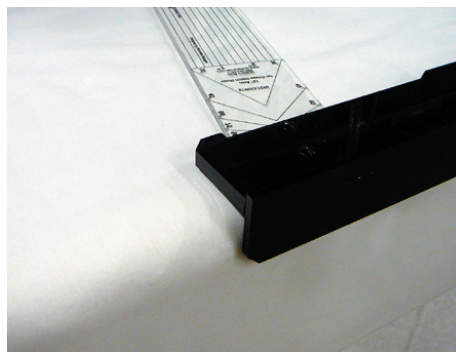

Close up view of the Cross Hatch Ruler Base over the front belly bar.